

PA 5054 VERSI

5.0m (16' 5") reach

NEW



Machine Features

- » 5.0m reach
- » Dual cutting (L.H and R.H cutting)
- » Front or rear mount
- » Five-point axle-mounting for rear-mount rear-drive
- » 3 point linkage or DIN plate for front mounting
- » 220 degree Power Slew
- » Hydraulic safety breakaway
- » High capacity oil cooler
- » Choice of attachments

Markets

- » Professional
- » Governmental
- » Contractors

Tractor Requirements




- » 4500kg minimum tractor weight
- » 75hp minimum tractor horsepower

Tractor Requirements			
Minimum Horse Power Requirements	75hp	Minimum Tractor Weight	4500kg
Machine Specification			
Maximum Reach	5.0m (16'5")	Power Arm Horsepower	54hp
Machine Weight with Flailhead (exc.oil)*	1071kg	Oil tank Capacity	110 ltr
Hydraulics			
Gear Semi Independent	—	Gear Totally Independent	■
Method of Attachment			
3-Point Linkage-Mounted (or DIN plate)	<input type="checkbox"/>	5-Point Axle Bracket-Mounted	<input type="checkbox"/>
Controls			
Cable Control	—	Xtra Touch Control - Mini (XTC - Mini)	—
Switchbox	—	Xtra Touch Control	—
Monolever	—	REVOLUTION Control + EDS (Optional)	■
Machine Equipment			
Parallel Arm Geometry	—	Telescopic Dipper Arm	—
Midcut Pack	—	Angle Float Kit - <i>Standard On Electric Models</i>	—
Lift Float Kit	—	Easy Drive System (EDS)	■
Oil Cooler	■	Power Slew	■
Safety Breakaway - <i>Hydraulic</i>	■	Cable Rotor Control - <i>Dual Rotation (Ti only)</i>	—
Road Lighting Kit	—	Electric Rotor Control - <i>Dual Rotation (Ti only)</i>	■
Warning Arrow - <i>Magnetic</i>	—	Window Guards	■
Cushioned Top Link	—	Debris Blower	—
Front Mounting Build	■	Orbitor Head Kit	—
Front Flap Kit	■	Flailhead Skid Kit	<input type="checkbox"/>
Hydraulic Roller	<input type="checkbox"/>	Flailhead Cushioned Grass Mowing Roller	<input type="checkbox"/>
Power Arm Attachments			
1.20m Swingtrim Cutter Bar	—	1.50m Omega Flailhead - <i>DD or BD</i>	—
1.50m Swingtrim Cutter Bar	—	1.60m Multicut Flailhead - <i>DD or BD</i>	—
1.50m Sheartrim Cutter Bar - <i>SD</i>	<input type="checkbox"/>	1.60m Omega Flailhead - <i>DD or BD</i>	—
1.60m Sheartrim Cutter Bar - <i>MD</i>	<input type="checkbox"/>	2.00m Multicut Flailhead - <i>DD or BD</i>	—
2.00m Sheartrim Cutter Bar - <i>MD</i>	<input type="checkbox"/>	1.20m Rotary Head - <i>FC - 2 Rotor</i>	—
1.40m Sheartrim Cutter Bar - <i>HD</i>	<input type="checkbox"/>	1.20m Rotary Head - <i>MD - 1 Rotor</i>	<input type="checkbox"/>
2.20m Sheartrim Cutter Bar - <i>HD</i>	<input type="checkbox"/>	1.50m Rotary Head - <i>HD - 1 Rotor</i>	—
1.00m Compact Supercut Flailhead - <i>GDD</i>	—	1.60m Multisaw 1600	—
1.20m Supercut Flailhead - <i>DD</i>	<input type="checkbox"/>	2.00m Multisaw 2000	<input type="checkbox"/>
1.20m Multicut Flailhead - <i>DD or BD</i>	—	2.40m Multisaw 2400	<input type="checkbox"/>
1.20m Omega Flailhead - <i>DD or BD</i>	—	0.70m Ditch and Grip Cleaner	<input type="checkbox"/>
1.50m Multicut Flailhead - <i>DD or BD</i>	—		

Standard Equipment ■ Optional Equipment Not Available —
 * depending on machine specification excluding attachment and oil

Control Options

The boxes that are ticked indicate the control options available for this Power Arm

<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	


»» Choice of Controls



»» Left-hand Cutting



»» Right-hand Cutting

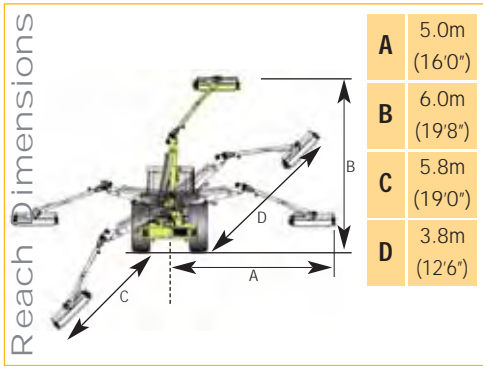

»» For illustration purposes only



»» Compact Transport Position